

Continental



HDL



CONTINENTAL
MEDIUM TRUCK

HDL


PREMIUM LONG HAUL DRIVE (HEAVY DRIVE LONG HAUL)

28/32" tread depth for long original mileage.

Open shoulder tread design provides excellent wet/dry traction, resists irregular wear and reduces stone retention.

Innovative lug angle provides outstanding traction throughout the life of the original tire.

Stone ejection system reduces stone retention and casing penetrations.

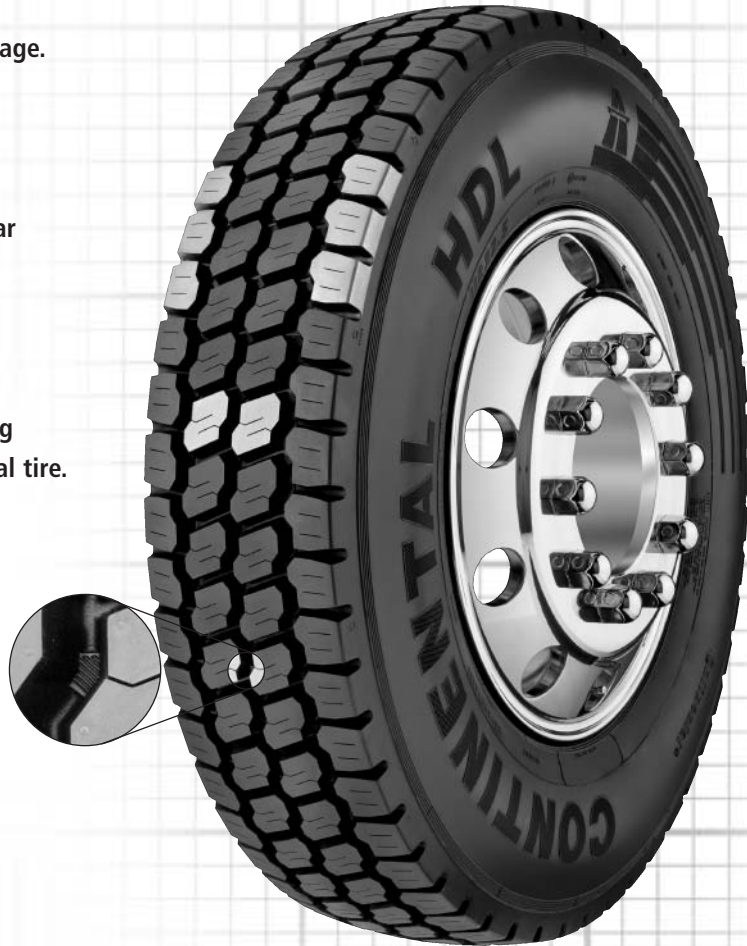

Applications:

Long haul, over the highway,
drive position.

TIRE SPECIFICATIONS

Highway - 75 mph at loads indicated unless otherwise stated.

TIRE SIZE	LOAD RANGE	TREAD DEPTH	PRODUCT CODE	SAP ARTICLE NUMBER	RIM WIDTH IN	OVERALL INFLATED DIAMETER IN (mm)	OVERALL INFLATED WIDTH IN (mm)	LOADED SECTION WIDTH IN (mm)	STATIC LOADED RADIUS IN (mm)	MINIMUM DUAL SPACING IN (mm)	REVS PER MILE (KM)	TIRE WEIGHT LB (KG)	MAX LOAD@INFLATION			
													SINGLE		DUAL	
												lbs (KG)	psi (KPa)	lbs (KG)	psi (KPa)	
11R22.5*	H	28/32	0210230	05684650000	8.25	41.8 (1062)	11.3 (287)	12.1 (307)	19.5 (495)	12.5 (318)	494 (307)	125 (57)	6610 (3000)	120 (830)	6005 (2725)	120 (830)
11R24.5	H	28/32	0210253	05684660000	8.25	43.8 (1113)	11.3 (287)	12.2 (310)	20.5 (521)	12.5 (318)	472 (293)	134 (61)	7160 (3250)	120 (830)	6610 (3000)	120 (830)
275/80R22.5*	H	28/32	0210635	05685530000	8.25	40.6 (1031)	11.5 (292)	12.2 (310)	18.9 (480)	12.5 (318)	510 (317)	120 (54)	6940 (3150)	120 (830)	6175 (2800)	120 (830)
285/75R24.5	H	28/32	0210658	05685540000	8.25	41.9 (1064)	11.2 (284)	12.1 (307)	19.4 (493)	12.5 (318)	494 (307)	126 (57)	6780 (3075)	120 (830)	6175 (2800)	120 (830)

Note: Minimum Dual Spacing calculated without chains.
These specifications subject to change without notice.

*ECE Certified