

Continental



HMS 45+



CONTINENTAL
MEDIUM TRUCK

HMS 45+


SUPER SINGLE ON/OFF HIGHWAY SERVICE

Multi-service tread pattern with a combination button and rib-type design for excellent performance.

Visual Alignment Indicators (VAI®) alert user to tire tracking problem.

10,000 lb load capacity for high load applications.

Cut and tear resistant compound for efficient on/off highway service.

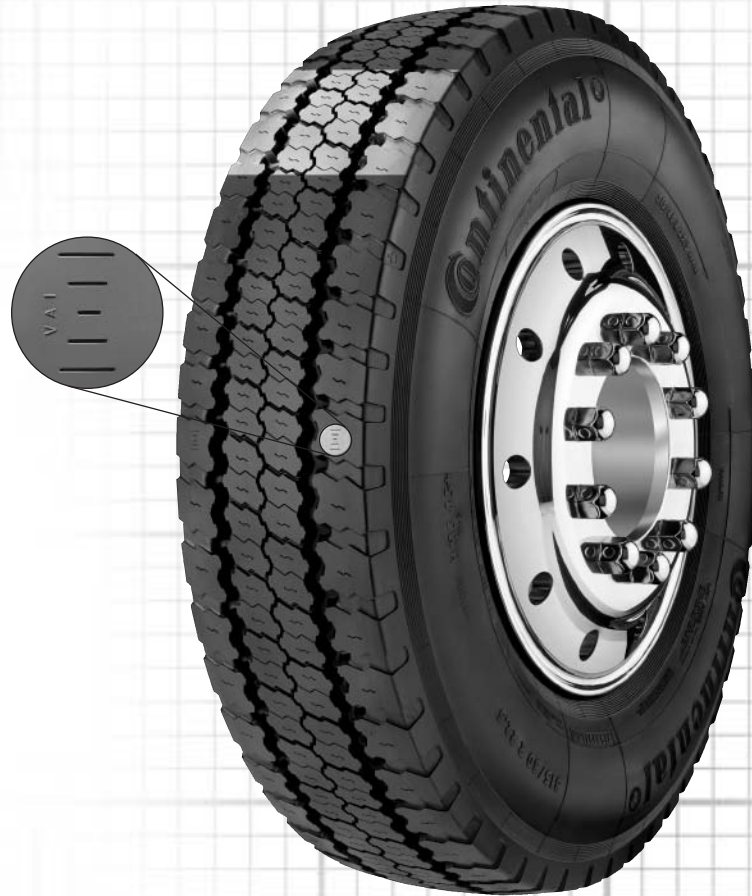

Applications:

Super single fitment for steer and trailer positions in on/off highway service.

TIRE SPECIFICATIONS

Speed restricted at 55 mph.

TIRE SIZE	LOAD RANGE	TREAD DEPTH	PRODUCT CODE	SAP ARTICLE NUMBER	RIM WIDTH IN	OVERALL INFLATED DIAMETER IN (mm)	OVERALL INFLATED WIDTH IN (mm)	LOADED SECTION WIDTH IN (mm)	STATIC LOADED RADIUS IN (mm)	MINIMUM DUAL SPACING IN (mm)	REVS PER MILE (KM)	TIRE WEIGHT LB (KG)	MAX LOAD@INFLATION			
													SINGLE lbs (KG)	psi (KPa)	DUAL lbs (KG)	psi (KPa)
315/80R22.5	L	23/32	0207004	05683190000	9.00	42.6 (1082)	12.3 (312)	12.9 (328)	19.7 (500)	13.8 (351)	486 (302)	139 (63)	10,000 (4540)	130 (900)	9090 (4125)	130 (900)

Note: Minimum Dual Spacing calculated without chains.
These specifications subject to change without notice.

Note: 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs.