

Continental



HSC



CONTINENTAL
MEDIUM TRUCK

HSC


ALL-POSITION ON/OFF HIGHWAY SERVICE (HEAVY STEER CONSTRUCTION)

New sidewall profile with curb rib reduces damage from curbing, cuts and abrasions.

Stone ejection system reduces stone retention and casing penetrations.

Visual Alignment Indicators (VAI®) alert user to tire tracking problems.

23/32" tread depth and cut/chip resistant tread compound provide long tread life in on/off road conditions.

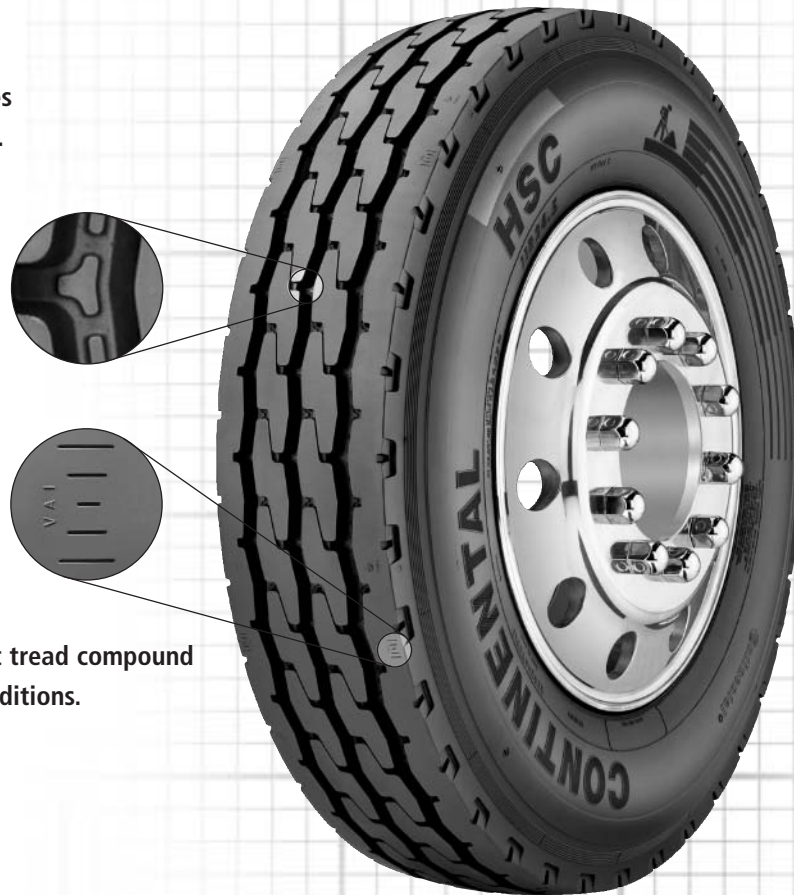

Applications:

Coal haulers, logging, construction, waste haulers, school buses and other on/off highway service.

TIRE SPECIFICATIONS Highway - 65 mph at loads indicated unless otherwise stated.

| TIRE SIZE | LOAD RANGE | TREAD DEPTH | PRODUCT CODE | SAP ARTICLE NUMBER | RIM WIDTH IN | OVERALL INFLATED DIAMETER IN (mm) | OVERALL INFLATED WIDTH IN (mm) | LOADED SECTION WIDTH IN (mm) | STATIC LOADED RADIUS IN (mm) | MINIMUM DUAL SPACING IN (mm) | REVS PER MILE (KM) | TIRE WEIGHT LB (KG) | MAX LOAD@INFLATION | | | |
|---|------------|-------------|--------------|--------------------|--------------|-----------------------------------|--------------------------------|------------------------------|------------------------------|------------------------------|--------------------|---------------------|--------------------|-----------|-------------|-----------|
| | | | | | | | | | | | | | SINGLE | | DUAL | |
| | | | | | | | | | | | | LB (KG) | psi (KPa) | LB (KG) | psi (KPa) | |
| TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS | | | | | | | | | | | | | | | | |
| 11R22.5* | H | 23/32 | 0238460 | 05683870000 | 8.25 | 41.9 (1062) | 11.1 (282) | 12.2 (310) | 19.6 (497) | 12.5 (318) | 494 (308) | 126 (57) | 6610 (3000) | 120 (830) | 6005 (2725) | 120 (830) |
| 11R24.5 | H | 23/32 | 0238465 | 05683880000 | 8.25 | 43.8 (1113) | 11.1 (282) | 12.2 (310) | 20.6 (523) | 12.5 (318) | 473 (294) | 132 (60) | 7160 (3250) | 120 (830) | 6610 (3000) | 120 (830) |
| 12R22.5* | H | 23/32 | 0238473 | 05683890000 | 9.00 | 42.9 (1090) | 12.4 (315) | 13.7 (347) | 20.2 (512) | 13.5 (343) | 483 (301) | 129 (59) | 7390 (3350) | 120 (830) | 6780 (3075) | 120 (830) |
| 12R24.5 | H | 23/32 | 0238476 | 05683900000 | 9.00 | 45.0 (1144) | 12.4 (315) | 13.7 (347) | 21.2 (539) | 13.5 (343) | 460 (286) | 136 (63) | 7830 (3550) | 120 (830) | 7160 (3250) | 120 (830) |
| TUBETYPE TIRES ON TYPE I, II, III RIMS | | | | | | | | | | | | | | | | |
| 12.00R20* | J | 23/32 | 0117065 | 05351250000 | 8.50 | 44.2 (1122) | 12.3 (313) | 13.6 (345) | 20.3 (515) | 13.8 (351) | 468 (291) | 160 (73) | 8270 (3750) | 120 (830) | 7390 (3350) | 120 (760) |
| 12.00R24* | L | 18/32 | 0182848 | 05353490000 | 8.50 | 48.3 (1226) | 12.3 (313) | 13.5 (343) | 22.3 (566) | 13.5 (342) | 429 (267) | 161 (73) | 9920 (4500) | 120 (830) | 8820 (4000) | 120 (830) |

Note: Minimum Dual Spacing calculated without chains.
These specifications subject to change without notice.

*ECE Certified

Form #: SS-HSC 07/05 ©Continental Tire North America, Inc. 2003