

Continental 

HSL



CONTINENTAL
MEDIUM TRUCK

HSL

PREMIUM LONG HAUL STEER (HEAVY STEER LONG HAUL)


Unique pyramid shaped stone ejectors help to eliminate stone retention.

Advanced tread compound for long original mileage.

Five rib tread design provides excellent wet traction and lateral stability.

Visual Alignment Indicators (VAI®) alert user to tire tracking problems.

Shoulder Protection Rib resists irregular shoulder wear.

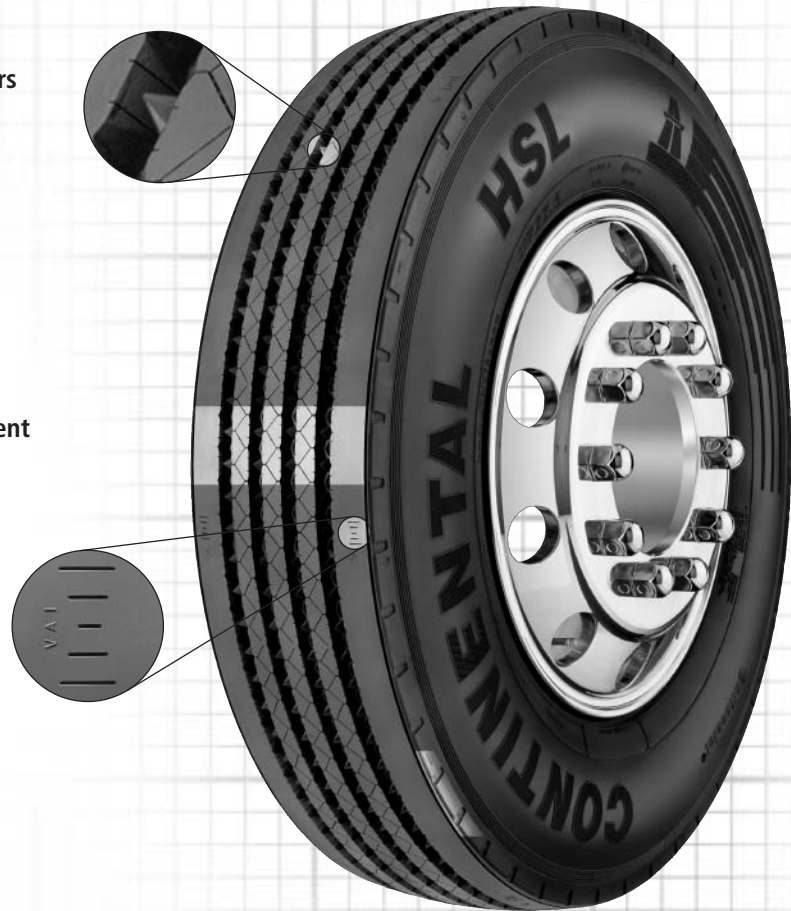

Applications:

Long haul and over the highway steering and all-position use.

TIRE SPECIFICATIONS

Highway - 75 mph at loads indicated unless otherwise stated.

TIRE SIZE	LOAD RANGE	TREAD DEPTH	PRODUCT CODE	SAP ARTICLE NUMBER	RIM WIDTH IN	OVERALL INFLATED DIAMETER IN (mm)	OVERALL INFLATED WIDTH IN (mm)	LOADED SECTION WIDTH IN (mm)	STATIC LOADED RADIUS IN (mm)	MINIMUM DUAL SPACING IN (mm)	REVS PER MILE (KM)	TIRE WEIGHT LB (KG)	MAX LOAD@INFLATION			
													SINGLE lbs (KG)	psi (KPa)	DUAL lbs (KG)	psi (KPa)
11R22.5*	H	18/32	0205621	05682610000	8.25	41.4 (1052)	11.0 (279)	12.2 (310)	19.4 (493)	12.5 (318)	500 (311)	116 (53)	6610 (3000)	120 (830)	6005 (2725)	120 (830)
11R24.5	H	18/32	0205622	05682620000	8.25	43.4 (1102)	11.0 (279)	12.2 (310)	20.4 (518)	12.5 (318)	475 (295)	126 (57)	7160 (3250)	120 (830)	6610 (3000)	120 (830)
275/80R22.5*	H	18/32	0205613	05682590000	8.25	40.1 (1019)	11.2 (284)	12.2 (310)	18.7 (475)	12.5 (318)	515 (320)	110 (50)	6940 (3150)	120 (830)	6175 (2800)	120 (830)
285/75R24.5	H	18/32	0205616	05682600000	8.25	41.4 (1052)	11.0 (279)	11.9 (302)	19.3 (490)	12.5 (318)	500 (311)	115 (52)	6780 (3075)	120 (830)	6175 (2800)	120 (830)

Note: Minimum Dual Spacing calculated without chains.
These specifications subject to change without notice.

*ECE Certified

Form #: SS-HSL 01/03 ©Continental Tire North America, Inc. 2003