

Continental



HSR-1



CONTINENTAL
MEDIUM TRUCK


HSR-1

PREMIUM REGIONAL STEER (HEAVY STEER REGIONAL)

Pyramidal stone ejectors in all tread grooves to stop stone retention for long casing life.

Tread pattern designed for excellent wet traction and reduced noise.

Tread compound designed to provide long tread life in regional applications.

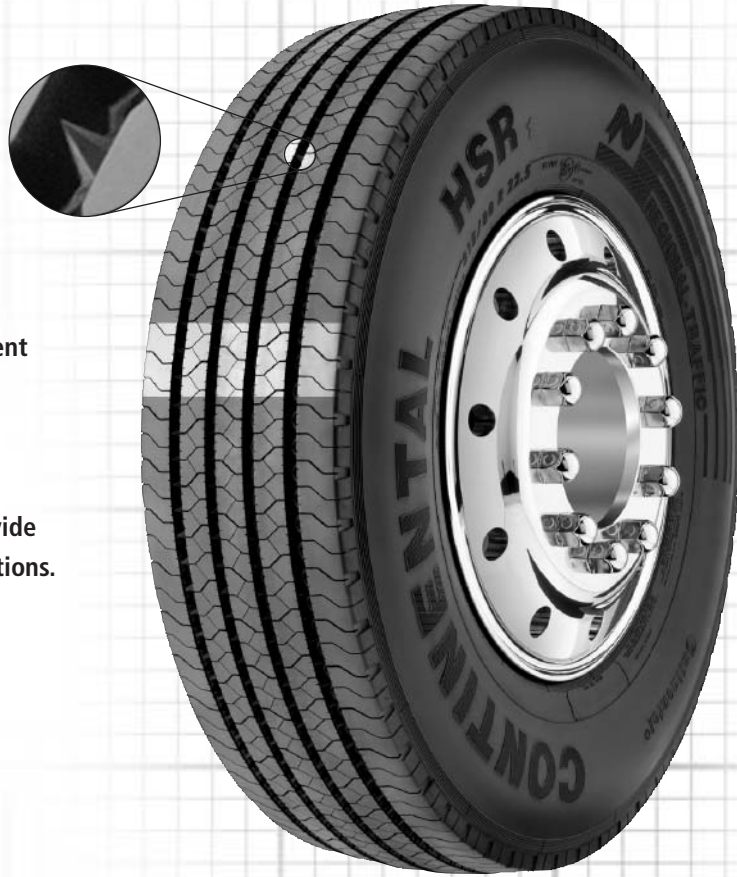

Applications:

Regional hauling and on/off road all-position.

TIRE SPECIFICATIONS

Highway - 75 mph at loads indicated unless otherwise stated.

TIRE SIZE	LOAD RANGE	TREAD DEPTH	PRODUCT CODE	SAP ARTICLE NUMBER	RIM WIDTH IN	OVERALL INFLATED DIAMETER IN (mm)	OVERALL INFLATED WIDTH IN (mm)	LOADED SECTION WIDTH IN (mm)	STATIC LOADED RADIUS IN (mm)	MINIMUM DUAL SPACING IN (mm)	REVS PER MILE (KM)	TIRE WEIGHT LB (KG)	MAX LOAD@INFLATION			
													SINGLE lbs (KG)	DUAL lbs (KG)		
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																
245/70R19.5*	H	16/32	0205605	04715430000	6.75	33.3 (846)	9.8 (249)	10.4 (265)	15.3 (389)	11.0 (279)	627 (390)	70 (32)	4940 (2240)	115 (790)	4675 (2120)	115 (790)
285/70R19.5	H	17/32	0205350	04715410000	8.25	35.3 (895)	11.1 (283)	12.3 (313)	16.0 (408)	12.5 (318)	586 (364)	95 (42)	6395 (2900)	125 (860)	6005 (2725)	125 (860)
305/70R19.5	J	18/32	0205349	04715420000	8.25	36.3 (923)	11.7 (297)	12.6 (320)	16.7 (424)	13.2 (335)	603 (375)	110 (52)	6940 (3150)	125 (860)	6395 (2900)	125 (860)
255/70R22.5	H	18/32	0206198	05713450000	7.50	36.6 (930)	9.9 (251)	10.8 (274)	17.0 (433)	11.3 (287)	566 (352)	94 (42)	5510 (2500)	120 (830)	5070 (2300)	120 (830)
275/70R22.5*	H	18/32	0205702	05713060000	8.25	38.3 (973)	10.9 (276)	11.9 (302)	17.6 (447)	12.5 (318)	551 (342)	106 (48)	6940 (3150)	130 (900)	6395 (2900)	130 (900)
295/80R22.5*	H	18/32	0205698	05717200000	9.00	41.4 (1052)	12.0 (305)	13.1 (332)	19.2 (487)	13.2 (335)	475 (295)	132 (60)	7830 (3550)	120 (830)	6940 (3150)	120 (830)

Note: Minimum Dual Spacing calculated without chains.
These specifications subject to change without notice.

*ECE Certified