

Continental



HTL



CONTINENTAL
MEDIUM TRUCK

ALL POSITION TRAILER (HEAVY TRAILER LONGHAUL)


Shoulder protection rib provides protection against rapid shoulder wear.

Visual Alignment Indicators (VAI®) alert user to tire tracking problems.

Scuff ribs protect sidewall from curbing and cutting.

Stone ejection system reduces stone retention.

13/32" tread depth minimizes tread squirm and irregular wear.

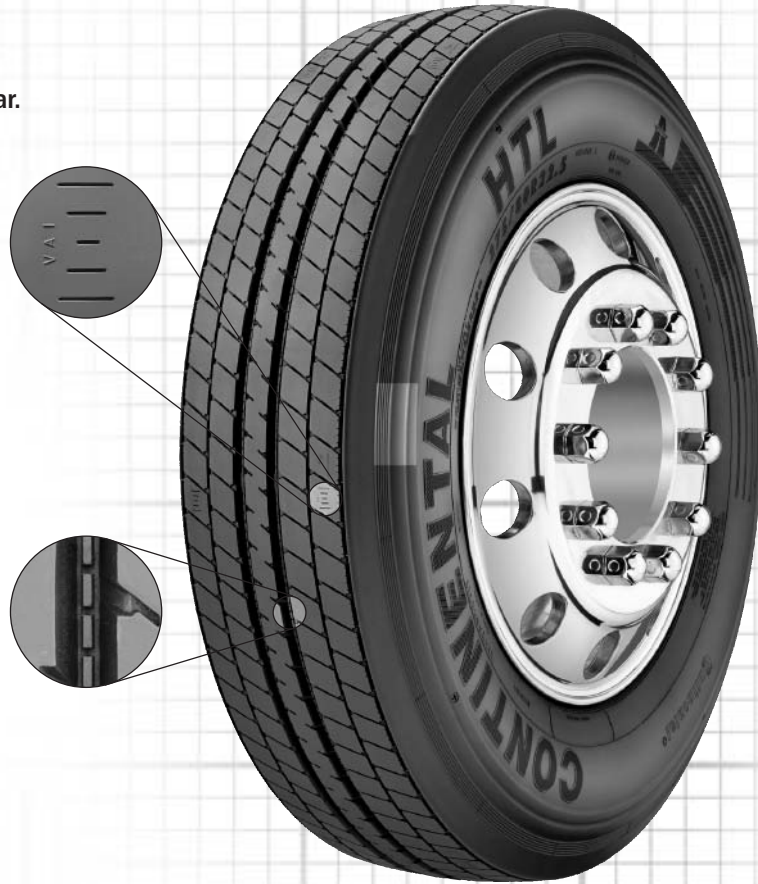

Applications:
Trailer and free rolling positions.

TIRE SPECIFICATIONS Highway - 75 mph at loads indicated unless otherwise stated.

TIRE SIZE	LOAD RANGE	TREAD DEPTH	PRODUCT CODE	SAP ARTICLE NUMBER	RIM WIDTH IN	OVERALL INFLATED DIAMETER IN (mm)	OVERALL INFLATED WIDTH IN (mm)	LOADED SECTION WIDTH IN (mm)	STATIC LOADED RADIUS IN (mm)	MINIMUM DUAL SPACING IN (mm)	REVS PER MILE (KM)	TIRE WEIGHT LB (KG)	MAX LOAD@INFLATION			
													SINGLE	psi	DUAL	psi
												lbs (KG)	psi (KPa)	lbs (KG)	psi (KPa)	
11R22.5*	G	13/32	0237259	05685390000	8.25	41.1 (1045)	11.1 (282)	12.2 (310)	19.3 (489)	12.5 (318)	503 (312)	106 (48)	6175 (2800)	105 (720)	5840 (2650)	105 (720)
11R22.5*	H	13/32	0239879	05683790000	8.25	41.1 (1045)	11.1 (282)	12.2 (310)	19.3 (489)	12.5 (318)	503 (312)	111 (50)	6610 (3000)	120 (830)	6005 (2725)	120 (830)
11R24.5	G	13/32	0237282	05685400000	8.25	43.0 (1092)	11.1 (282)	12.2 (310)	20.2 (514)	12.5 (318)	480 (298)	114 (51)	6610 (3000)	105 (720)	6005 (2725)	105 (720)
11R24.5	H	13/32	0239884	05683800000	8.25	43.0 (1092)	11.1 (282)	12.2 (310)	20.2 (514)	12.5 (318)	480 (298)	119 (54)	7160 (3250)	120 (830)	6610 (3000)	120 (830)
275/80R22.5*	G	13/32	0237303	05685410000	8.25	39.8 (1011)	10.9 (278)	12.0 (305)	18.5 (471)	12.5 (318)	518 (322)	101 (46)	6175 (2800)	110 (760)	5675 (2575)	110 (760)
275/80R22.5*	H	13/32	0239887	05683810000	8.25	39.8 (1011)	10.9 (278)	12.0 (305)	18.5 (471)	12.5 (318)	518 (322)	101 (46)	6940 (3150)	120 (830)	6175 (2800)	120 (830)
285/75R24.5	G	13/32	0237323	05685420000	8.25	41.0 (1041)	10.9 (278)	12.0 (305)	19.1 (485)	12.5 (318)	504 (313)	107 (48)	6175 (2800)	110 (760)	5675 (2575)	110 (760)
285/75R24.5	H	13/32	0239890	05683820000	8.25	41.0 (1041)	10.9 (278)	12.0 (305)	19.1 (485)	12.5 (318)	504 (313)	110 (50)	6780 (3075)	120 (830)	6175 (2800)	120 (830)

Note: Minimum Dual Spacing calculated without chains.
These specifications subject to change without notice.

*ECE Certified