

**Continental** 

**HTR-1**



CONTINENTAL  
MEDIUM TRUCK


# HTR-1

## ALL-POSITION TRAILER (HEAVY TRAILER REGIONAL)

Wide tread and new tread compound provide long original tread life.

Pyramid stone ejectors in all tread grooves help to eliminate stone retention for long casing life.

Tread pattern designed for optimized footprint and reduced noise.

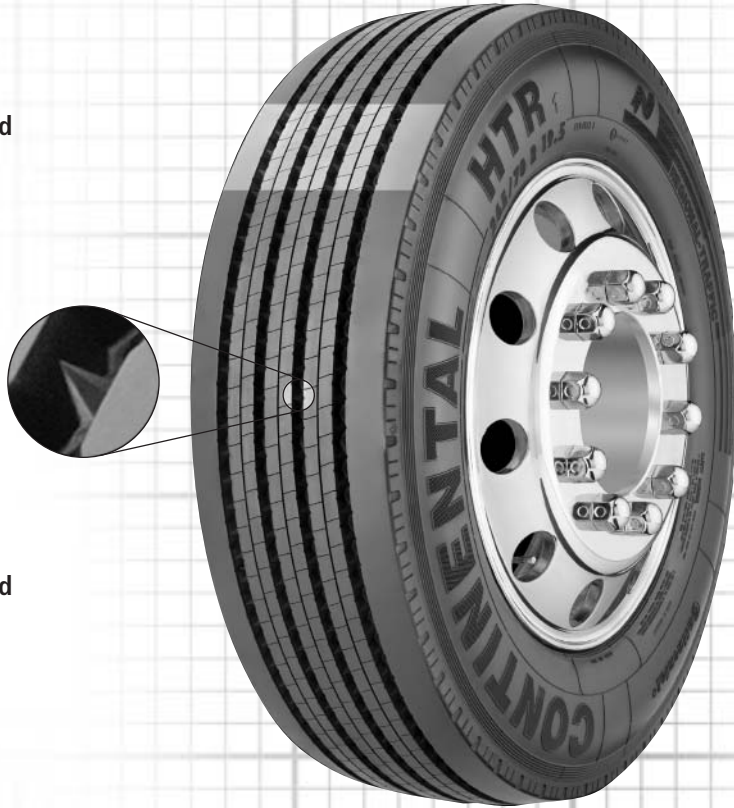

### Applications:

Local and long haul trailer position.

### TIRE SPECIFICATIONS

Highway - 65 mph at loads indicated unless otherwise stated.

TIRE SIZE	LOAD RANGE	TREAD DEPTH	PRODUCT CODE	SAP ARTICLE NUMBER	RIM WIDTH IN	OVERALL INFLATED DIAMETER IN (mm)	OVERALL INFLATED WIDTH IN (mm)	LOADED SECTION WIDTH IN (mm)	STATIC LOADED RADIUS IN (mm)	MINIMUM DUAL SPACING IN (mm)	REVS PER MILE (KM)	TIRE WEIGHT LB (KG)	MAX LOAD@INFLATION			
													SINGLE		DUAL	
												lbs (KG)	psi (KPa)	lbs (KG)	psi (KPa)	
265/70R19.5	J	16	0206111	04545300000	7.50	34.1 (866)	10.3 (262)	11.5 (292)	15.6 (396)	11.6 (295)	608 (378)	75 (34)	6005 (2725)	120 (830)	5675 (2575)	120 (830)
285/70R19.5	J	17	0206112	04545330000	8.25	35.3 (895)	11.1 (283)	12.3 (313)	16.0 (408)	12.5 (318)	586 (364)	95 (42)	6940 (3150)	120 (830)	6395 (2900)	120 (830)

Note: Minimum Dual Spacing calculated without chains.  
These specifications subject to change without notice.

\*ECE Certified